



Solenoid Dosing Pump

- Standard PVDF Pump head
- Standard ceramic ball valve
- Diaphragm is made of pure solid PTFE with 5 years warranty
- 100-240V stabilize multi power supply



HMS-200


HML-200

Solenoid Dosing Pump



HMS-200 and HML-200 are a single frequency, micro processor controlled solenoid dosing pump with constant flow rate and easy operation.


Specification		
Pressure Bar(pipe)	8	10
Flow rate L/H	5	3
Stroke ml/min	0.52	0.31
Frequency	160	
Connector	1/2"-3/8" Thread, PVC	

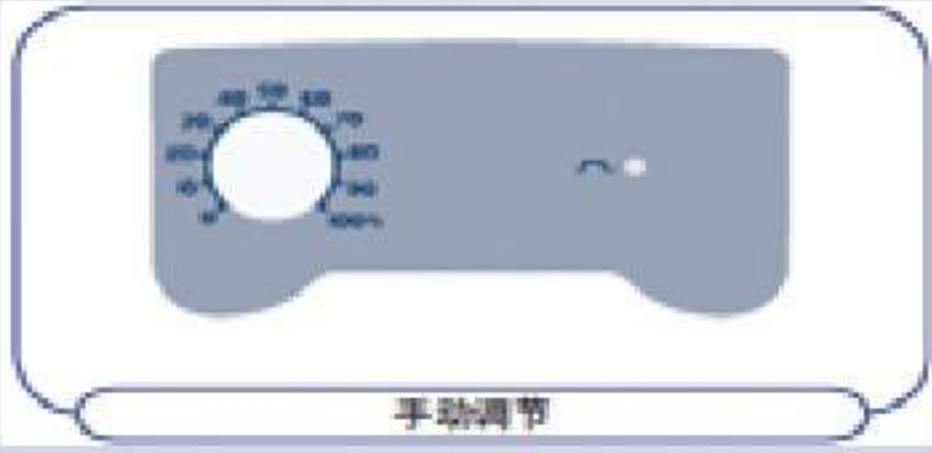Operation instruction	
	Manually adjustable flow rate control dial on the front panel with power-on LED indicator HML series with level control input.
Flow rate adjust range	0-100%


Information		
Outer shell	PP	IP65
Valve head	Pump Head: PVDF	I/O valve: PVDF
	Ball valve: ceramic	Diaphragm: PTFE
Power supply	230V / 50Hz for HMS Series 100-240V, 50-60Hz for HML Series : 12W	
Installation	Wall-mounted / Verticle	
Net weight	2.4Kg	



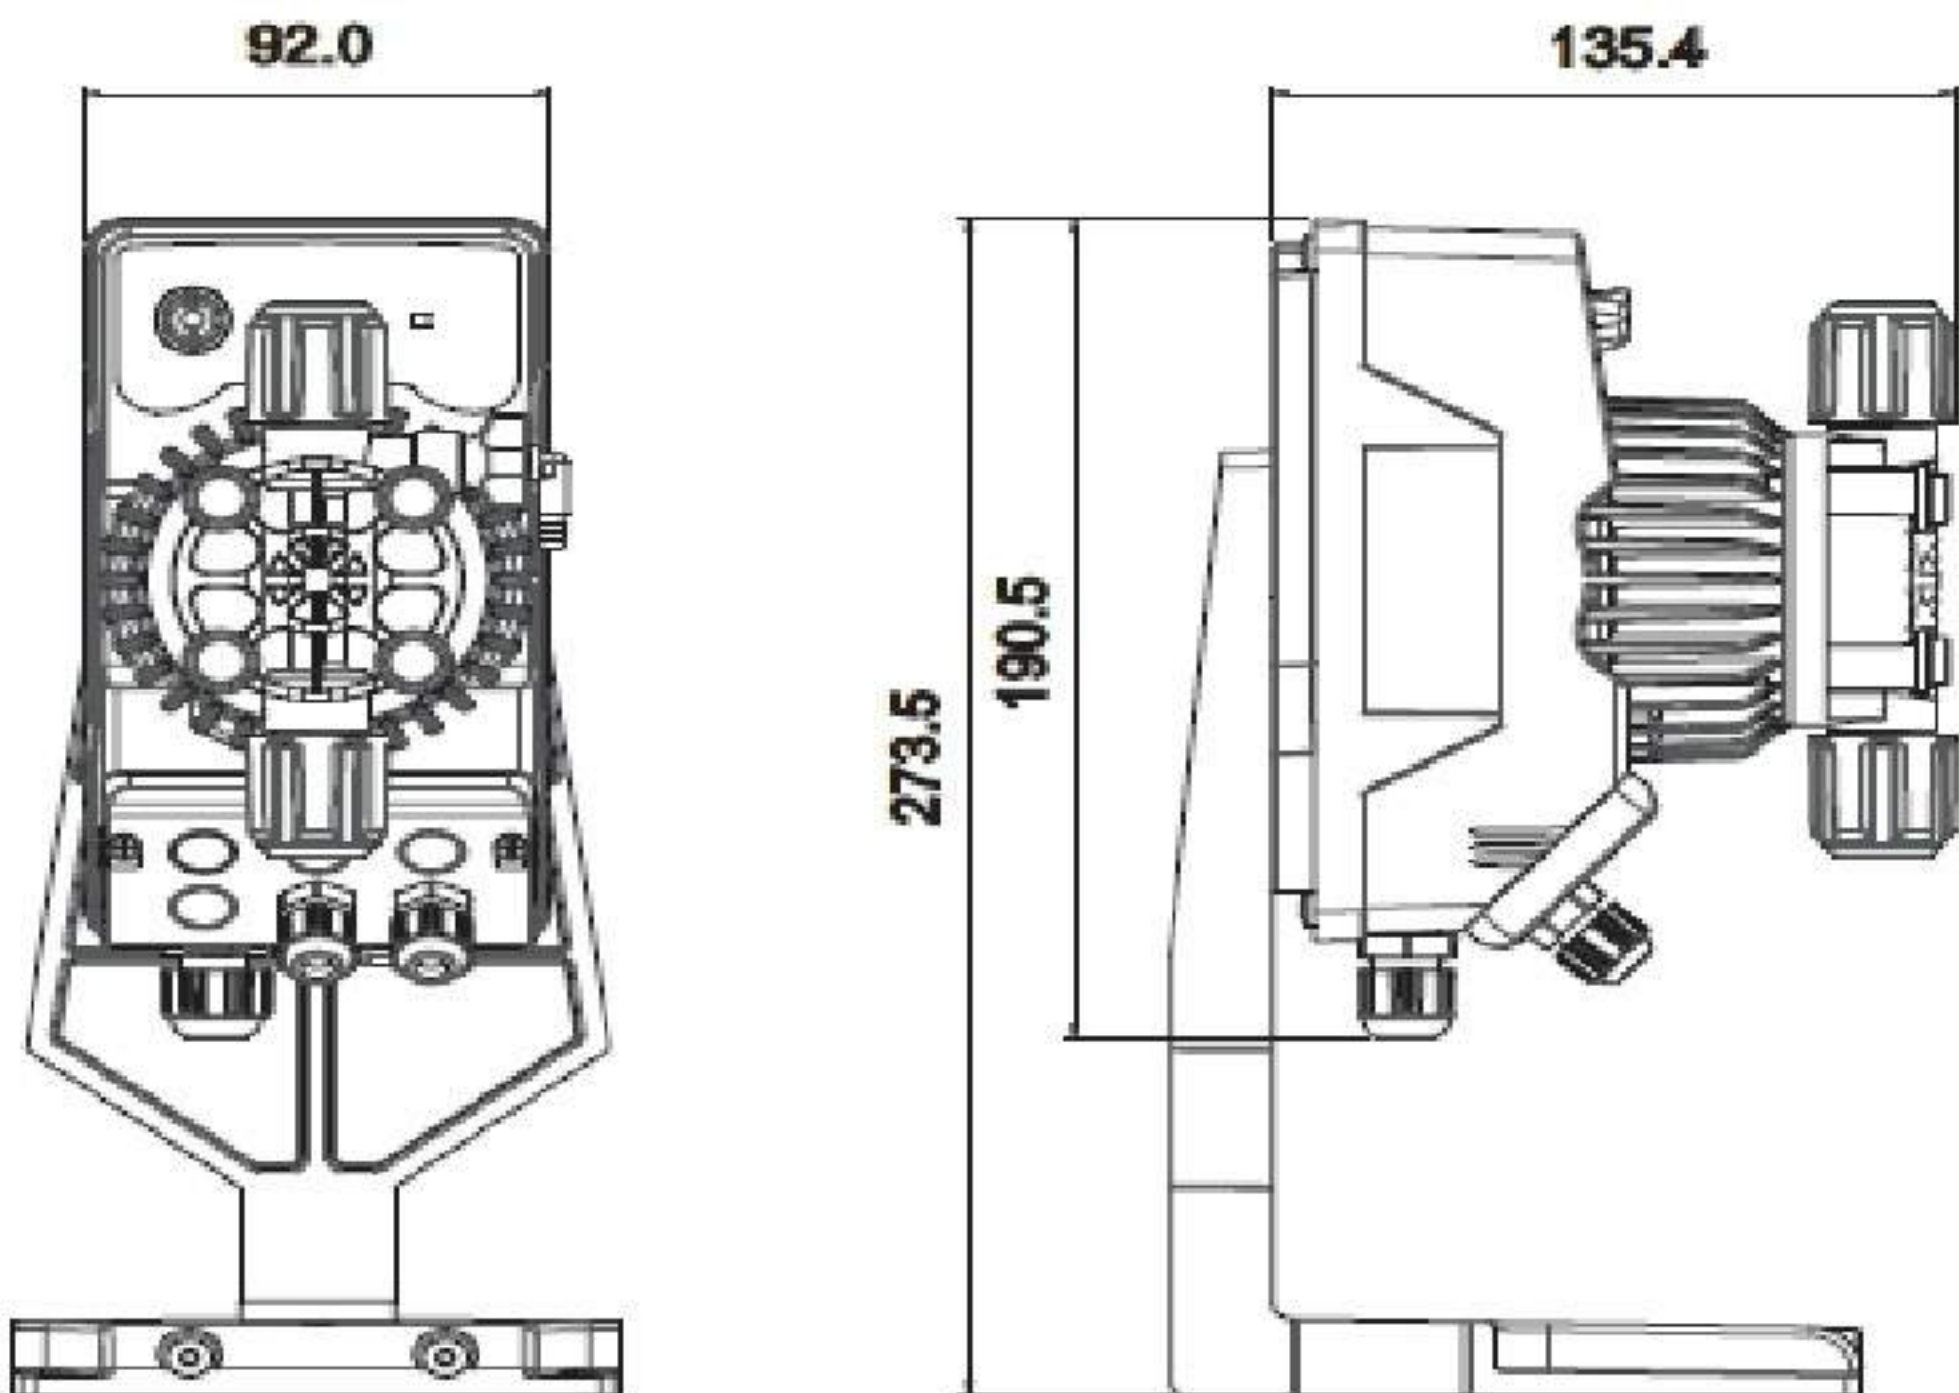

Measurements





Installation Kit



Injection valve
1


Foot valve
1


Delivery tube


PVC suction tube


Wall-mounted
Bracket x 1


Vertical mounted
Bracket x 1

HKL-600 Solenoid Dosing Pump




HKL-600 is a stable and easy operation electronic controlled dosing pump with two frequency adjustable and level control input.


Specification				
Pressure Bar(pipe)	20	19	14	8
Flow rate L/H	2.5	3.0	4.2	7
Stroke ml/min	0.35	0.42	0.58	0.97
Frequency	120			
Connector	1/2"-3/8" Thread, PVC			

Operation instruction	
	Two frequency manually adjustable flow rate control dial on the front panel with power-on LED indicator and level control input.
Flow rate adjust range	:5--0-20% :1--0-100%


Information		
Outer shell	PP	IP65
Valve head	Pump Head: PVDF	I/O valve: PVDF
	Ball valve: ceramic	Diaphragm: PTFE
Power supply	100-240V, 50-60Hz: 20W	
Installation	Wall-mounted / Verticle	
Net weight	3.9Kg	

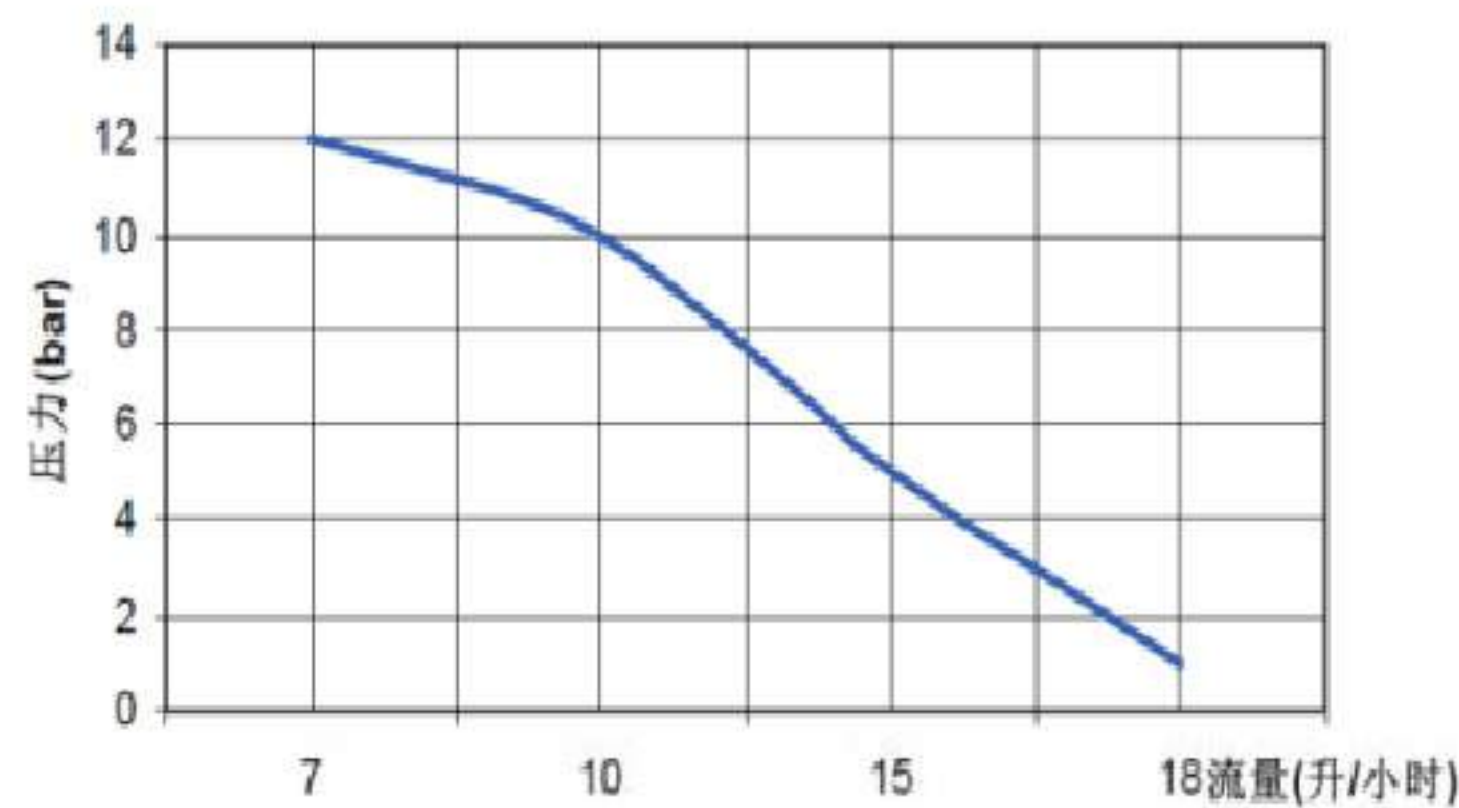


Measurements

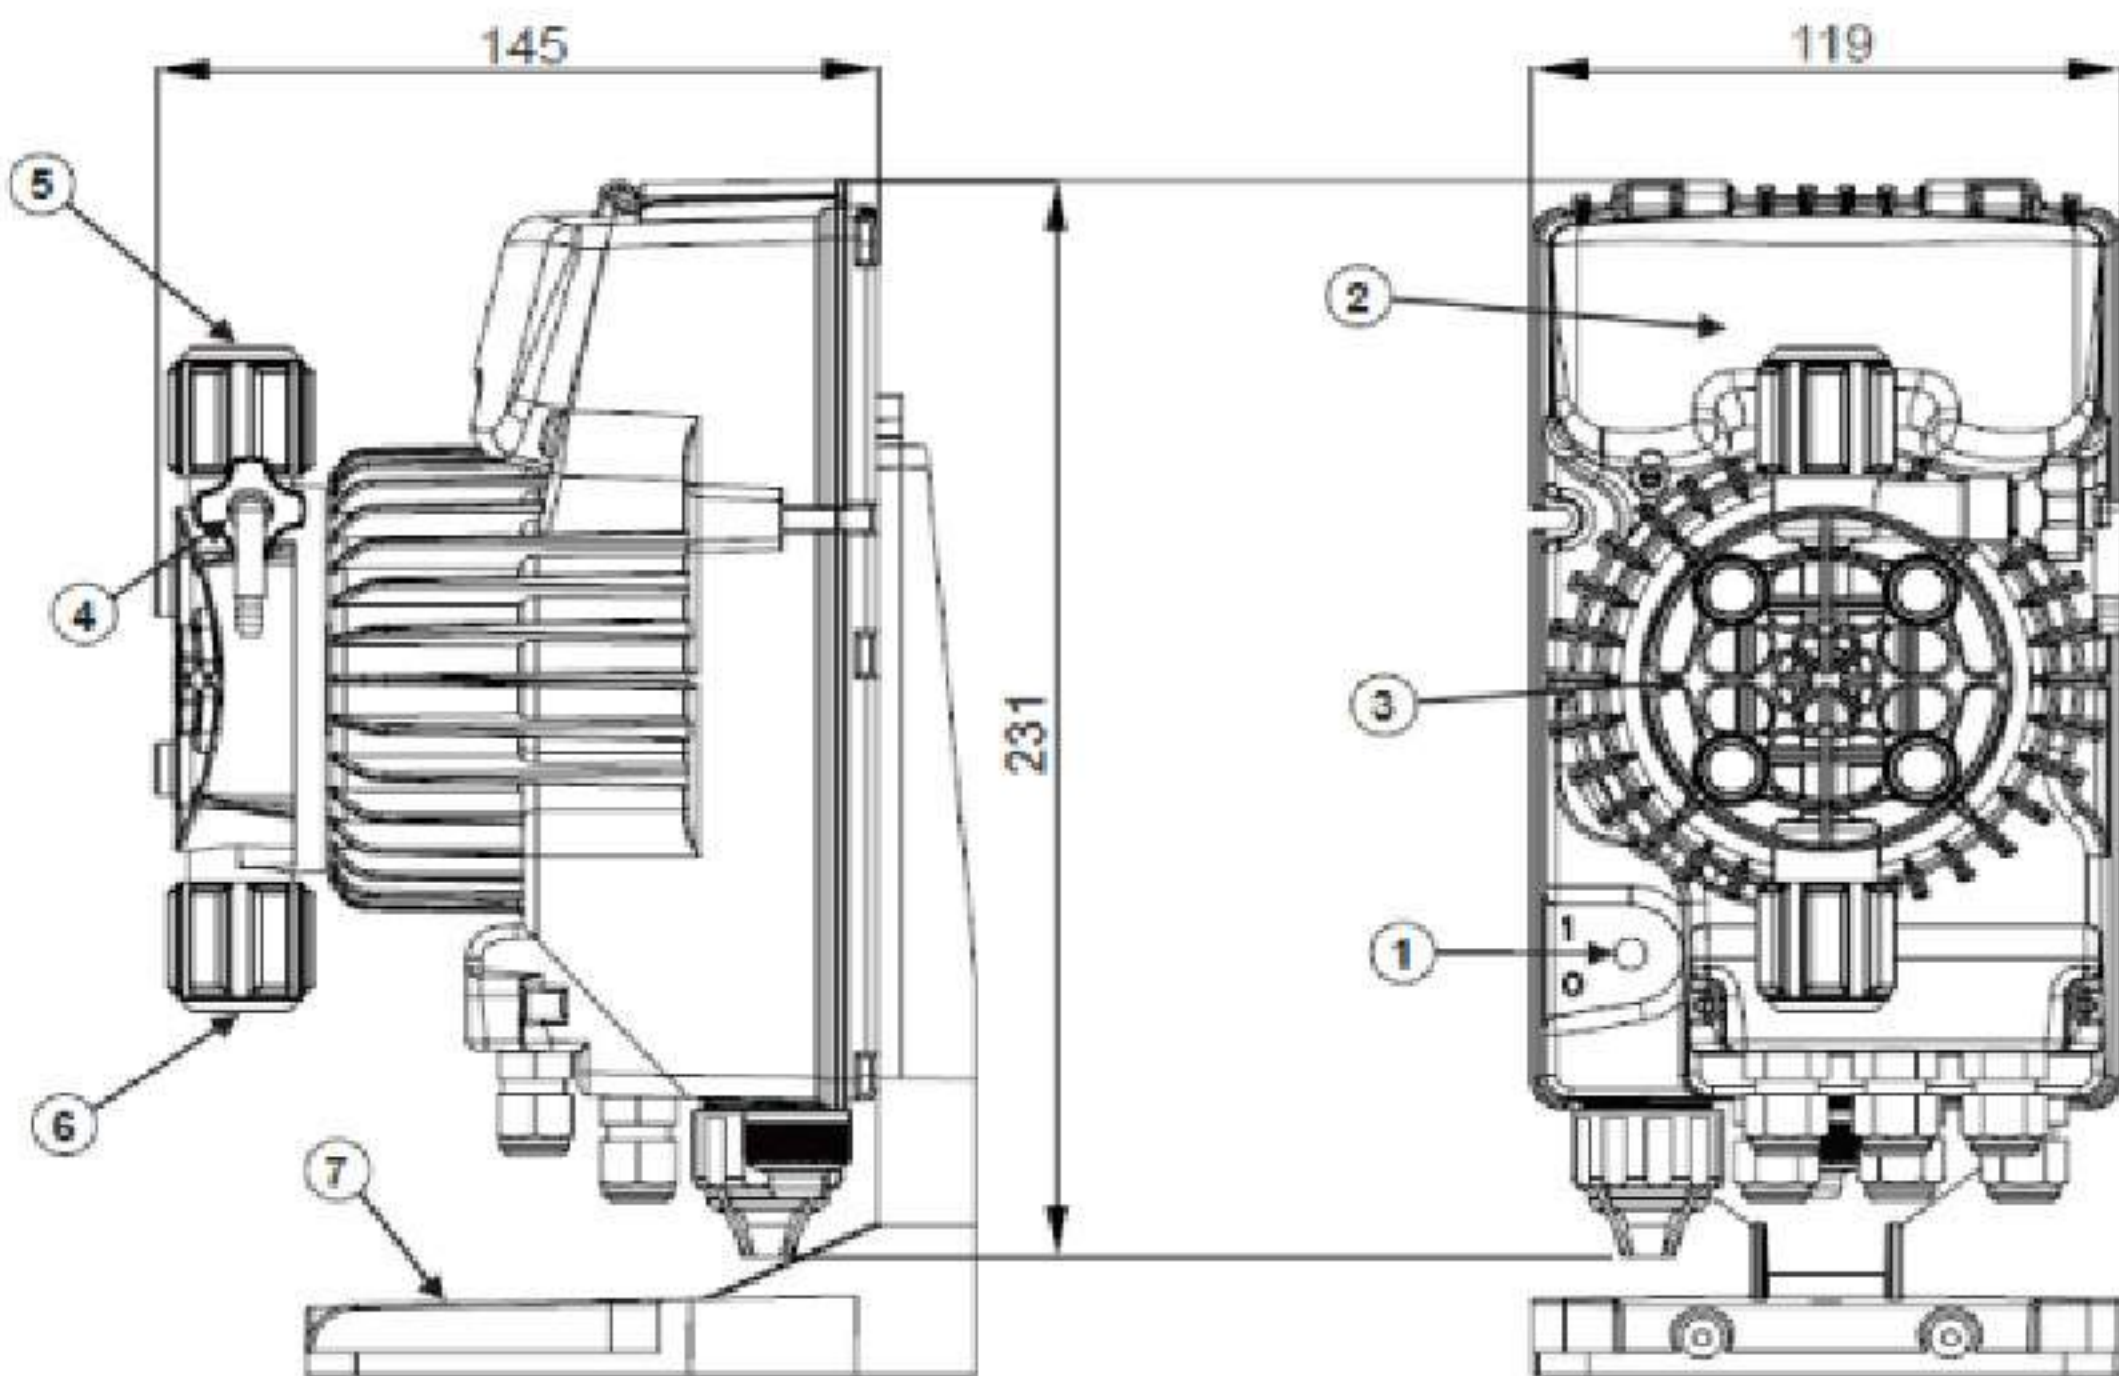


Installation Kit




Injection valve
1




Foot valve
1




Delivery tube



PVC suction tube



Wall-mounted
Bracket x 1



Vertical mounted
Bracket x 1

HKL-800 Solenoid Dosing Pump




HKL-800 is a stable and easy operation electronic controlled dosing pump with two frequency adjustable and level control input.


Specification				
Pressure Bar(pipe)	12	10	5	1
Flow rate L/H	7	10	15	18
Stroke ml/min	0.36	0.52	0.78	0.94
Frequency	300			
Connector	1/2"-3/8" Thread, PVC			

Operation instruction	
	Two frequency manually adjustable flow rate control dial on the front panel with power-on LED indicator and level control input.
Flow rate adjust range	:5--0-20% :1--0-100%

Information		
Outer shell	PP	IP65
Valve head	Pump Head: PVDF	I/O valve: PVDF
	Ball valve: ceramic	Diaphragm: PTFE
Power supply	100-240V, 50-60Hz: 40W	
Installation	Wall-mounted / Verticle	
Net weight	4.4Kg	

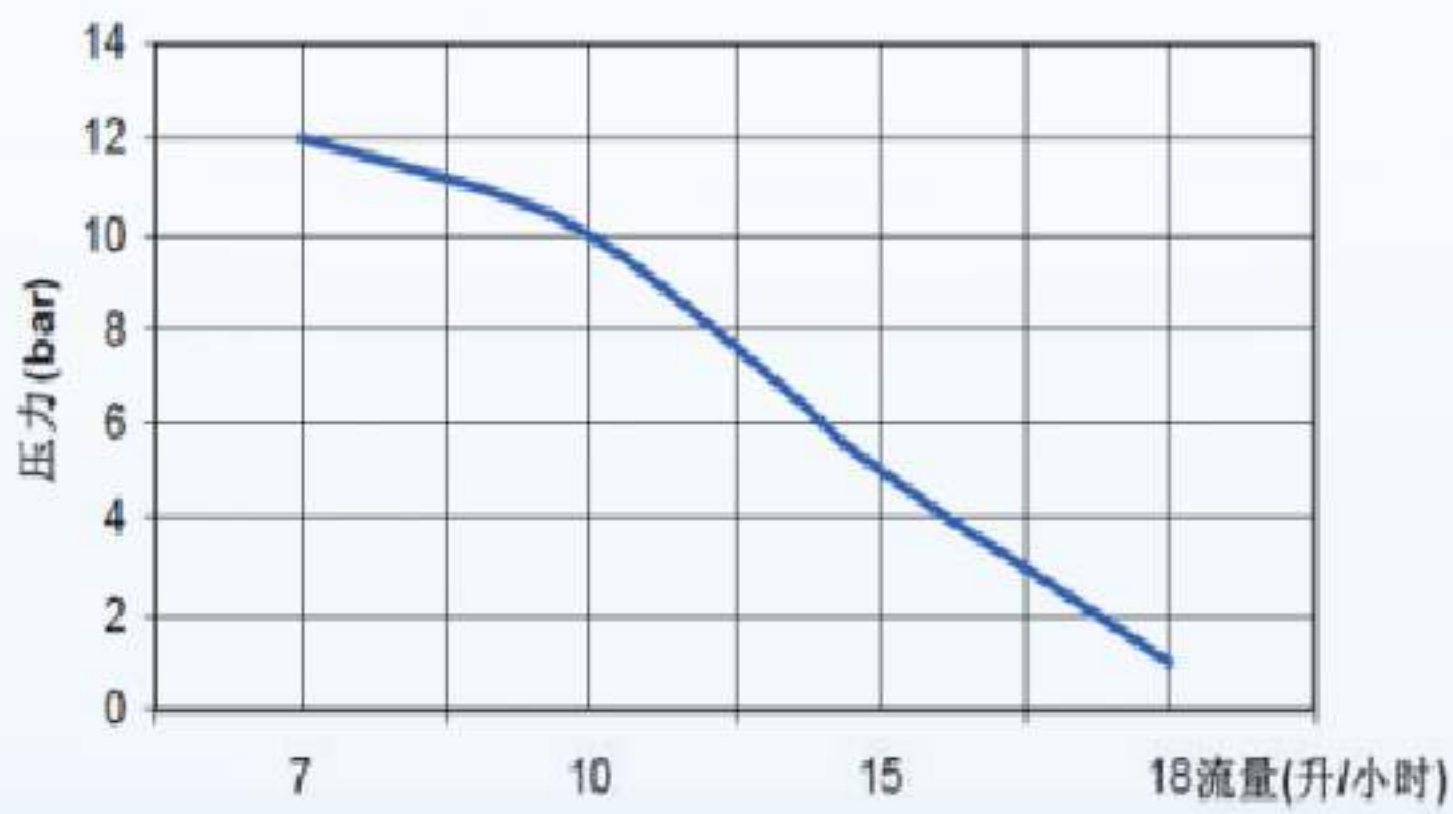

Measurements

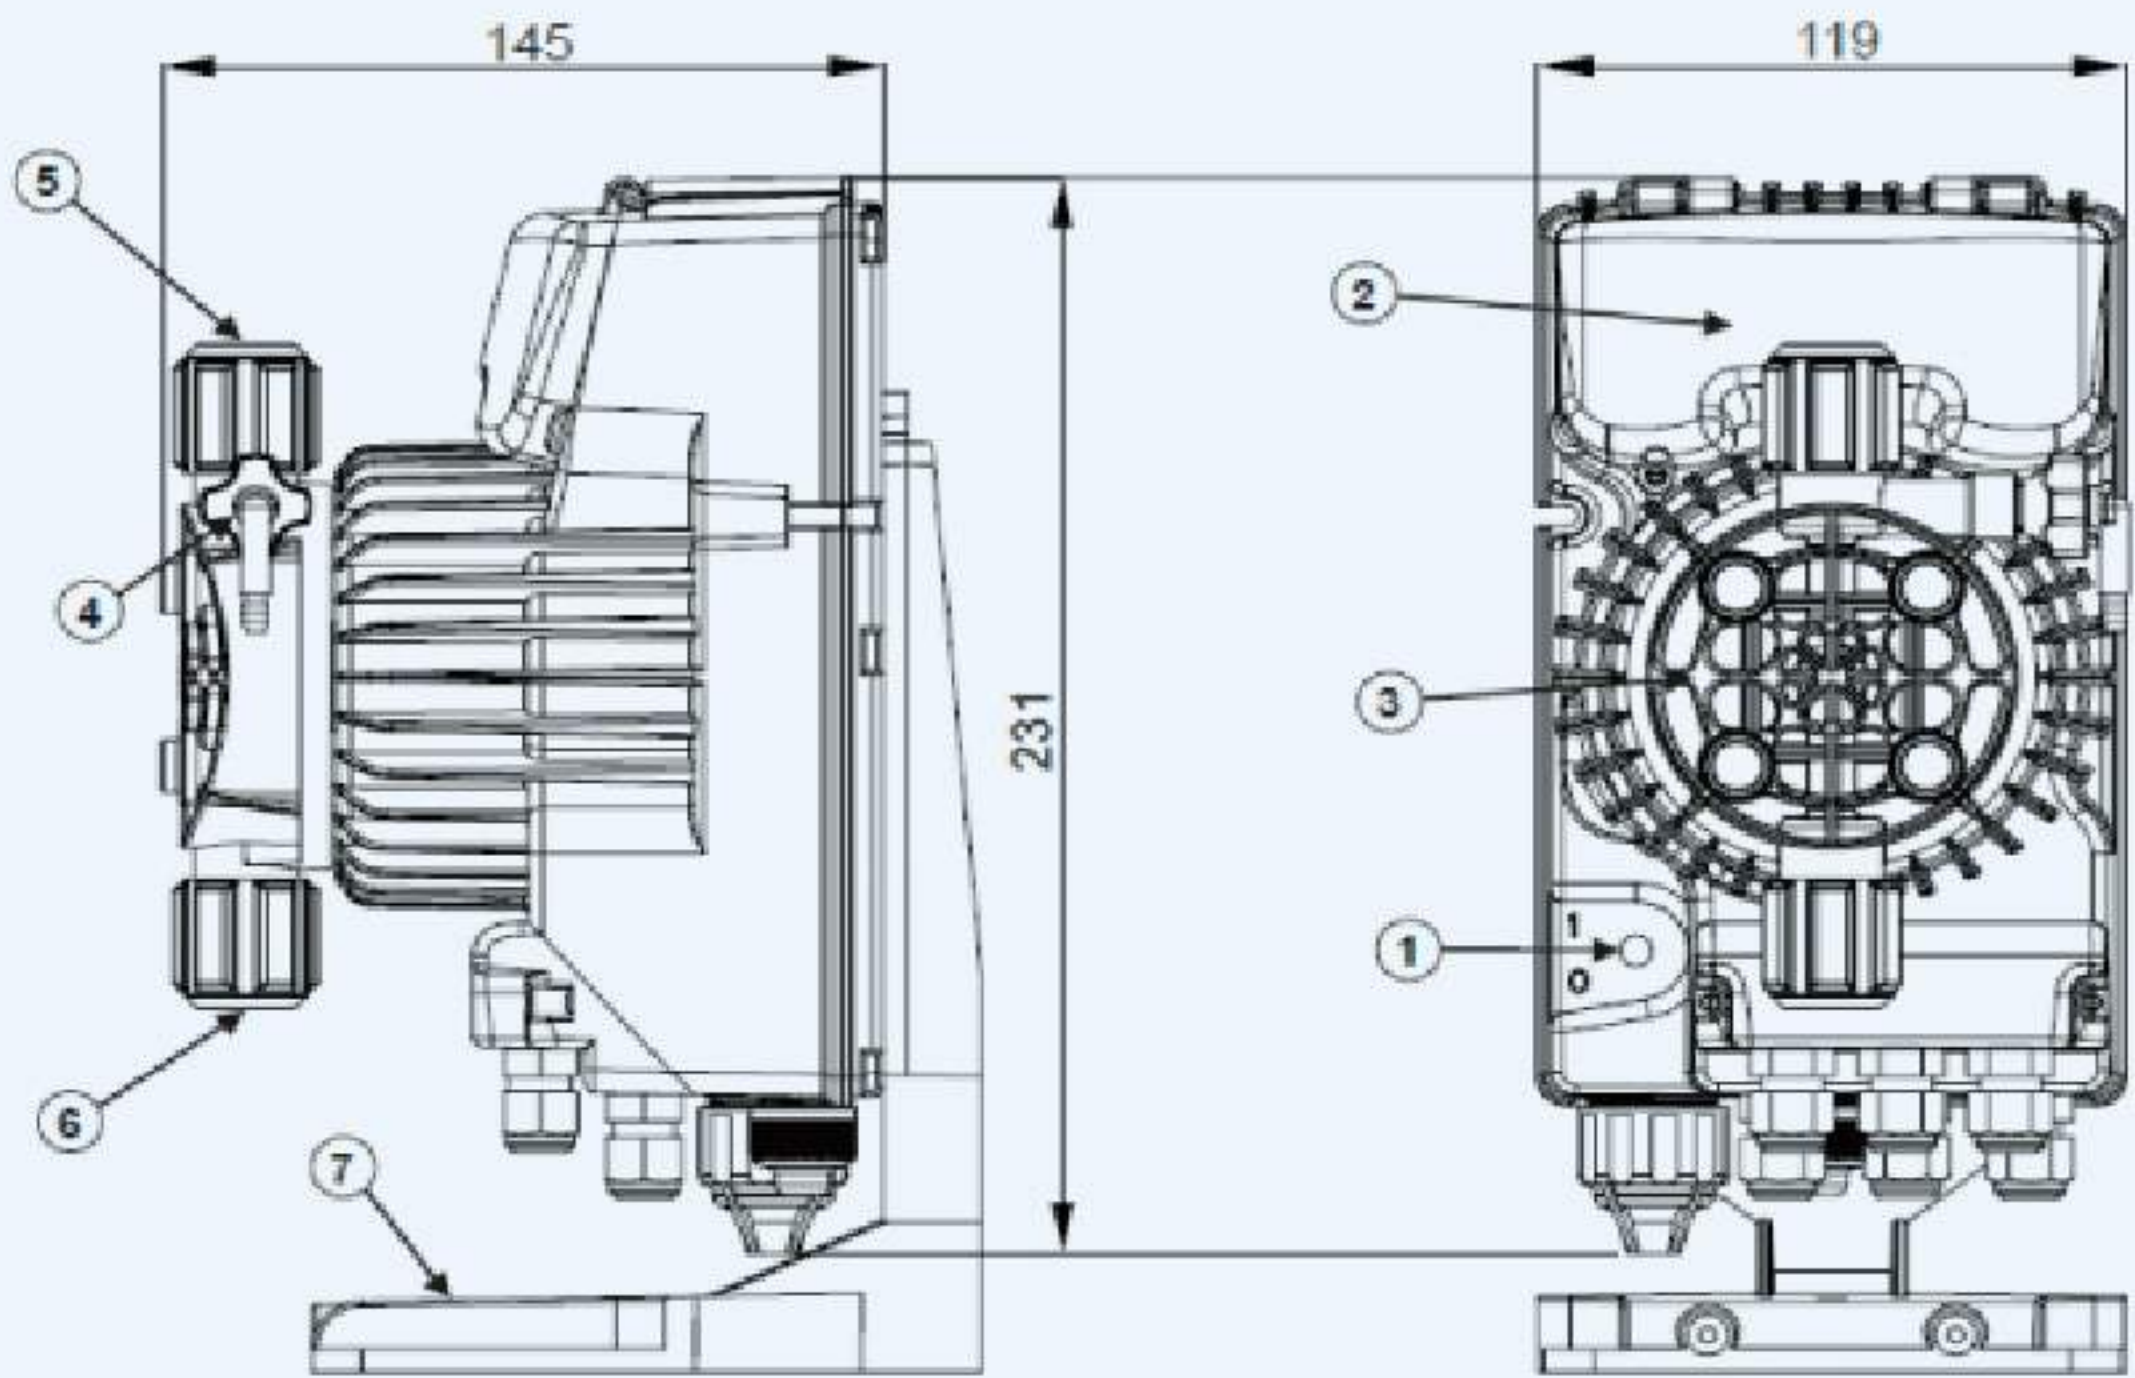

Installation Kit



Please contact for more information